6 - TROUBLESHOOTING

If your gun is not shooting, first verify that the gun is off safe and in the semi or automatic position. Next, visually inspect your wiring on both your battery and AEG as frayed, kinked, exposed wiring can easily cause your AEG to malfunction. Inspect the Tamiya connectors and verify that both terminals are completely seated to your battery. Further inspection of the wiring connecting inside of the buffer tube and leading into the gearbox may also be required.

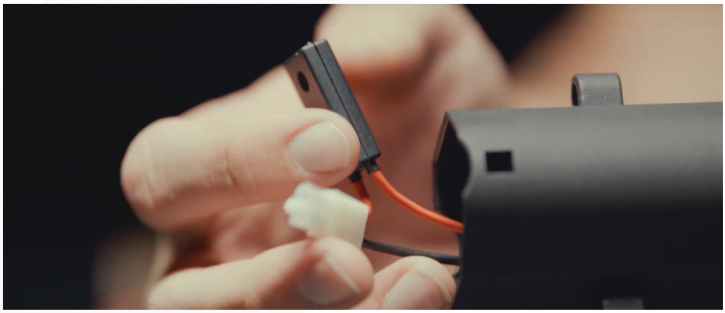

If the issue persists, please contact KWA Customer Service for further instructions and RMA repair.

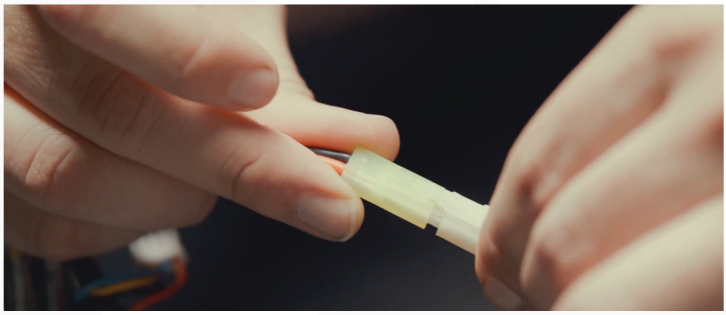

If your motor or battery is excessively hot after normal usage, you may have a pinched wire and it is recommended to contact KWA Customer Service for assistance.

Please note, our guns do have a break-in period of 1,000 rounds. You may experience less than optimal hop-up performance prior to reaching the 1,000 round break-in.